

100 red and green 2 light manual

Parameter:

Product Size: 300 * 150 * 85MM

The number of beads: Red / green each 40pcs

Lamp beads Category: Taiwan Epistar

Red Wavelength: 620-625NM

Green wavelength: 500-505NM

Life: 100000H

Shell material: PC

Operating temperature: -40°C-65°C

Operating voltage: DC24V

Visual distance: ≥300M

Installation: horizontally or vertically



Figure 1

Product installation



Installation: Horizontal Figure 2

1. Open the nut on the top and bottom
2. use "L" bracket, use nut to fix well
3. Dig 2 holes on the pole, use bracket and nut to fix it.

Installation: Vertical

Same as horizontal installation, just make the light in vertical position

Notice,

1. Visor on the top
2. Outlet port at bottom



Figure 3



Figure 4

Wire instruction:

1. Red wire—Red light positive
2. Green wire—Green light positive
3. black wire—Common negative
4. Connect DC24V

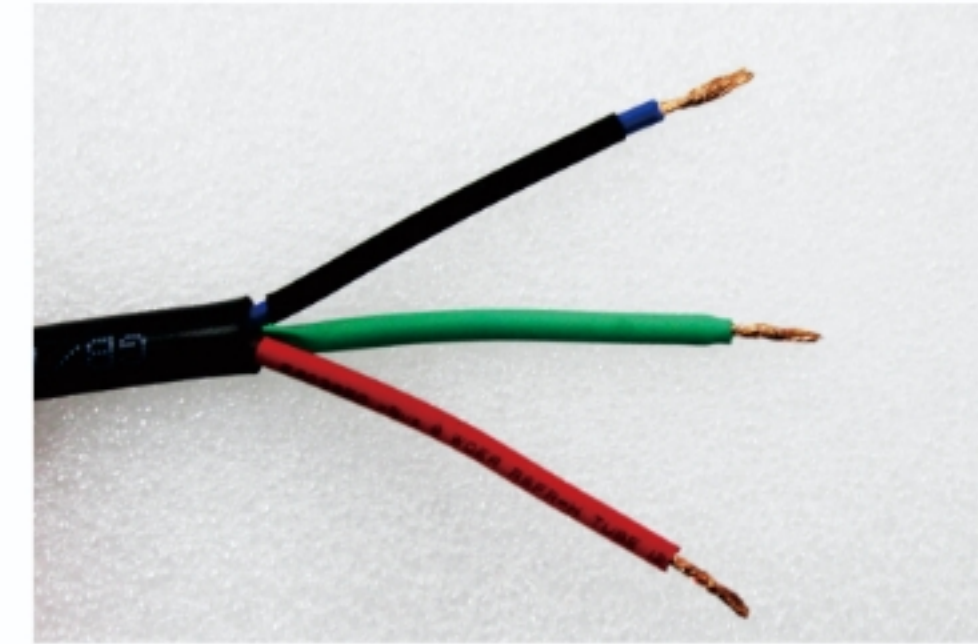


Figure 5

Accessories details

1. Light: 1 set
2. L-type bracket: 2
3. manual : 1 copies

Precautions

This product is plastic shell, do not stress, so as to avoid damage to the shell.

After sale service

1. Product Warranty: 2 years
2. After sale: damages caused by human or natural disasters and other factors not covered under the warranty.
3. Warranty only for the main product, accessories are not covered (custom product except)
4. Please use it under the guidance of a pro.
5. The shipping costs of the returning faulty products for repair shall be covered by the buyers.
6. Do not disassemble without permission