

# DockMag

MagSeal

Magnetic attachment Flexible base



### Savings

Environmentally durable solution, reduced repair and maintenance costs.

### Health

A safe, dry and draught free working environment for employees.

### Installation

Quick, universal installation by unique patented magnetic fastening.

### Hygiene

Reduced dust, moisture and air pollution.

### Safety

Complies with the international health and safety regulations

## DockMag Product specifications

### Specifications DockMag for dock levellers


Flexible, fibre-reinforced material for inside and outside applications, UV and mildew resistant.

Temp. resistance	-20C up to +70C
Coating	Acrylate
Tensile strength	2600/2400 (N/5cn) DIN 53354
Tear resistance	250/250 (N) DIN 53386
Built in depth/ width	>4mm/120mm
Colour	Black/yellow logo optional
Permanent magnet	Universal installation
Thickness	> 1,0 mm
Material property	Anisotropic
Bonding capacity	Lifelong (without external influences)



### Available sizes/ models

SAML 35 (35 mm lip)	SAML 60 (60mm lip)	SAMLH (Hinge side) (40/60/80mm lip) (1-5 m)
1000mm - 4500mm	1000 - 4500mm	1000 - 5000mm

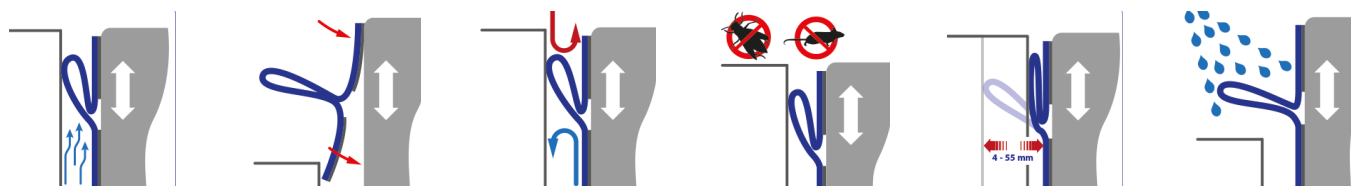

IDD-Parts BV  
Hanzeweg 19  
3771 NG Barneveld  
The Netherlands  
T: +31 (0)342 490 990  
E: [info@iddparts.nl](mailto:info@iddparts.nl)  
[www.iddparts.nl](http://www.iddparts.nl)

IDD-Parts France  
Le Loup 13 rue du Morellon  
38070 St Quentin Fallavier  
France  
T: +33 (0) 4 74 82 47 29  
E: [info@iddparts.fr](mailto:info@iddparts.fr)  
[www.iddparts.fr](http://www.iddparts.fr)

IDD-Parts Deutschland  
Hüntestrass 72  
26871 Papenburg/ Aschendorf  
Germany  
T: +49 (0)4962 9969 720  
E: [info@iddparts.de](mailto:info@iddparts.de)  
[www.iddparts.de](http://www.iddparts.de)