



DoorMag

MagSeal

Magnetic attachment Flexible base



Savings

Environmentally durable solution, reduced repair and maintenance costs.

Health

A safe, dry and draught free working environment for employees.

Installation

Quick, universal installation by unique patented magnetic fastening.

Anti-rodent

Environmentally durable solution, reduced repair and maintenance costs.

Hygiene

Reduced dust, moisture and air pollution.

Safety

Complies with the international health and safety regulations.

DoorMag Product specifications

Specifications DoorMag for Overhead doors


Flexible, fibre-reinforced material for inside and outside applications, UV and mildew resistant.

Temp. resistance	-20C up to +70C
Coating	Acrylate
Tensile strength	2600/2400 (N/5cn) DIN 53354
Tear resistance	250/250 (N) DIN 53386
Colour	Standard color 7016, other RAL or black/ yellow and logo optional
Permanent magnet	Universal installation
Thickness	> 1,0 mm
Material property	Anisotropic
Bonding capacity	Lifelong (without external influences)


Available sizes

DoorMag/ SAMTS

SAMTS40 400mm
SAMTS40 450mm
SAMTS40 480mm

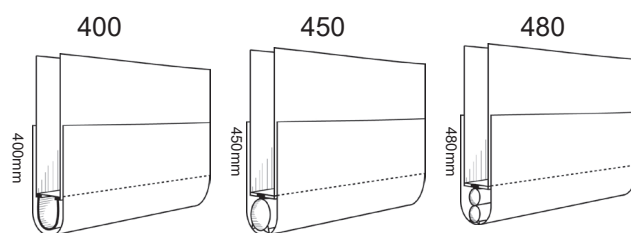

Standard color 7016, other RAL or black/
yellow and logo optional



Can be supplied upto max 9200mm

For aluminium panel use adapter strap SMB.
Order 2x the length.



IDD-Parts BV
Hanzeweg 19
3771 NG Barneveld
The Netherlands
T: +31 (0)342 490 990
E: info@iddparts.nl
www.iddparts.nl

IDD-Parts France
Le Loup 13 rue du Morellon
38070 St Quentin Fallavier
France
T: +33 (0) 4 74 82 47 29
E: info@iddparts.fr
www.iddparts.fr

IDD-Parts Deutschland
Hüntestrass 72
26871 Papenburg/ Aschendorf
Germany
T: +49 (0)4962 9969 720
E: info@iddparts.de
www.iddparts.de