



# DoorMag

MagSeal

Magnetic attachment Flexible base



## Savings

Environmentally durable solution, reduced repair and maintenance costs.

## Health

A safe, dry and draught free working environment for employees.

## Installation

Quick, universal installation by unique patented magnetic fastening.

## Anti-rodent

Environmentally durable solution, reduced repair and maintenance costs.

## Hygiene

Reduced dust, moisture and air pollution.

## Safety

Complies with the international health and safety regulations.

## Doormag Product specifications

### Specifications DoorMag for Pedestrian doors


Flexible, fibre-reinforced material for inside and outside applications, UV and mildew resistant.

Temp. resistance	-20C up to +70C
Coating	Acrylate
Tensile strength	2600/2400 (N/5cm) DIN 53354
Tear resistance	250/250 (N) DIN 53386
Built in depth/ width	>4mm/120mm
Colour	Standard color 7016, other RAL or black/ yellow and logo optional.
Permanent magnet	Universal installation
Thickness	> 1,0 mm
Material property	Anisotropic
Bonding capacity	Lifelong (without external influences)





### Available sizes

#### DoorMag / SAMT

1,000 mm	100
1,125 mm	112
1,250 mm	125
1,500 mm	150
2,000 mm	200
2,250 mm	225
2,500 mm	250

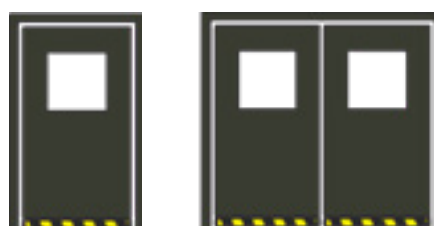

for closing 4 to 55mm gaps



IDD-Parts BV  
Hanzeweg 19  
3771 NG Barneveld  
The Netherlands  
T: +31 (0)342 490 990  
E: [info@iddparts.nl](mailto:info@iddparts.nl)  
[www.iddparts.nl](http://www.iddparts.nl)

IDD-Parts France  
Le Loup 13 rue du Morellon  
38070 St Quentin Fallavier  
France  
T: +33 (0) 4 74 82 47 29  
E: [info@iddparts.fr](mailto:info@iddparts.fr)  
[www.iddparts.fr](http://www.iddparts.fr)

IDD-Parts Deutschland  
Hüntestrass 72  
26871 Papenburg/ Aschendorf  
Germany  
T: +49 (0)4962 9969 720  
E: [info@iddparts.de](mailto:info@iddparts.de)  
[www.iddparts.de](http://www.iddparts.de)