

# Data Sheet

201001055/ 201001058 / 201001060

Hydraulic Unit Telescopic Lip 2V with liniair oiltank



## Motor:

Power 1,5 kW


Poles 2 (2820 turn. /min), nominal tension 230/400V-50Hz, Absorption -3,5A to 400V, intermittent service – S2-1min

## Pump:

Cubic capacity  $q=2,1\text{cc}$

Gear type, with fixed capacity  $Q= 5,5 \text{ Lt/min}$

It is forbidden to invert the sense of rotation even it is for brief periods time.

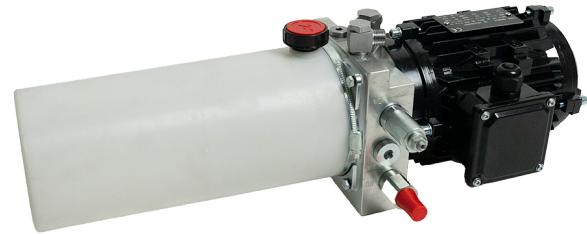

Dimensions L x W x H = 462x268x229mm

**Pressure:**  $p(\text{max}) = 18 \text{ MPa}$

**Electromagnets:** 24VDC18W

**Warning:** If the pump works without intaking oil, it will be damaged in an irreparable way.

**Filter:** Made of metallic nets, filtering capacity  $90\mu\text{m}$ .

**Oil:** Mobil DTE 10 Exel 15 (article nr 2020003 5 Litres). Quantity  $V=4,5 \text{ Litres}$

**Oil Plug:** The power pack oil plug features an internal air filter, it has a diameter of G1/2inch

**Article number IDD-Parts:** 201001055/ 201001058 / 201001060

## Attention:

In case your control box still has traditional glass fuses, make sure they are at least 10A slow.

V1 = Main cylinder

V2 = Lip Cilinder

C1= Lift cylinder

C2= Blocked or 2nd Lift cylinder

A= Lip cylinder (connection, 1 lip out)

B= Lip cylinder (connection 2, lip in)

**Note:** Hydraulic schedule page 2  
Adjustable bracket page 2

